



CHOOSE QUALITY.....

WHIRLPOOL BRAND COMMERCIAL LAUNDRY PRODUCTS

FEATURING ON PREMISE SINGLE LOAD SOLUTIONS



Reliability, Flexibility, Durability, and Simplicity... From the Industry Leader in Laundry

WHIRLPOOL® HOME APPLIANCES. WORLD'S BEST SELLING HOME LAUNDRY*

It's the 21st century and "good enough" just isn't enough anymore. Your customers expect more from their laundry facility. They want easy to use, large capacity machines that provide many options for quality fabric care.

The entire commercial line-up of Whirlpool® washers and dryers follows with exceptional capacity, cleaning, and drying performance. Each model has combined fabric care options and conveniences that enhance **your power to satisfy each customer's needs.**

Six Key Factors to Consider During Your Equipment Selection:

1. Energy Consumption
2. Ease of Use
3. Performance
4. Durability
5. Flexibility
6. Warranty

Hospitality

Customers feel secure knowing that they are using equipment backed by the world's largest manufacturer of laundry products. Our experienced Whirlpool distributors will guide you through every step of creating a hospitality laundry room able to efficiently care for your diverse guest laundry needs.

Salons and Gyms

We can handle the tough requirements of your sheets, towels and workout gear. Your employees and customers will feel safe with the quality, reliability and efficiency of the world's leading brand of major appliances.

Military Applications

Fatigues and boots are no match for the capacity and quality of Whirlpool Brand Commercial Laundry. Bring the troops to the laundry room with confidence, Whirlpool Brand Commercial Laundry is up to the task.

MAXIMIZE REVENUE

Whirlpool® Commercial Laundry Products are designed for simplicity, durability and flexibility to meet a variety of needs. A simple mechanical timer and Direct-Drive, NO BELT Washing System offers years of reliable operation at a very competitive price. Every Whirlpool® Washer features the 2 speed advantage, offering a true low speed gentle wash option. A high speed spin of 640 rpm ensures optimal water extraction.

A heavy gauge cabinet with powdered paint top and lid is difficult to dent and resists rust.

WHIRLPOOL® DIRECT-DRIVE, NO-BELT WASHING SYSTEM



During the service lifetime of a typical Speed Queen® or GE® commercial belt-driven top load washer, it is possible that many belts will need to be replaced. Belt driven washing machines rely on belt slippage to slowly build up spin speed.

Machines get overloaded — Belts wear — Belts break — and your machine is out of commission.

WHY SETTLE FOR 50 YEAR OLD BELT-DRIVEN TECHNOLOGY?

Whirlpool® Direct-Drive, NO-BELT, enclosed clutch washers eliminate the need for belts. Whirlpool® brand Direct-Drive washer motor coupler isolators feature a heavy duty automotive design. They have been tested to 20,000 cycles without failure!*

No belts equate to less hassle, fewer repairs, and an uninterrupted income stream for you.



WHIRLPOOL

VS



THE COMPETITION

One Durable Whirlpool® Motor Coupler Isolator can be Equivalent to Many Competitive Product Belts!

Maximize the Efficiency and Profitability of your Laundry Area with Whirlpool® Brand Commercial Laundry Products Featuring Factory Equipped Coin Slide and Coin Box

*Whirlpool Lab Testing, 2001. GE is a registered trademark of General Electric Corporation.

SPEED QUEEN is a registered trademark of Alliance Laundry Systems, LLC

For warranty details, see information packed with your product. Call 1-800-NO-BELTS or visit www.whirlpoolcommerciallaundry.com/warranty.asp

WHIRLPOOL BRAND COMMERCIAL WASHERS



DIRECT DRIVE SYSTEM

27" heavy-duty commercial washers feature the Direct-Drive, No-Belt washing system for greater reliability, reduced down time and increased profits.

LARGE CAPACITY WASH BASKET

Ideal for handling family size loads!

POWDERED PAINT FINISH

Powdered paint top, lid and cabinet finish to resist chipping and scratching.



HIGH AND LOW WATER LEVEL

Reduce water consumption to 25.22 gallons per cycle!*

*Based on low water level, 3 lb. load



TRIPOD SUSPENSION

Sturdy tripod-suspension with active liquid filled balance ring reduces

product weight while balancing commercial size laundry loads.



SEALED HIDDEN LID SWITCH

To help ensure safe operation, Whirlpool®

commercial washers feature a lid switch that is truly hidden. Not only does this prevent tampering, it ensures that the washer will not operate when the lid is open.

ON PREMISE NON METERED COMMERCIAL WASHER

Featuring Mechanical Controls



GCAM2792TQ—27" 2-Speed On Premise Non Metered Washer

EXCLUSIVE 90 DAY FACTORY LABOR WARRANTY!!

- 3.2 Cu. Ft. Wash Basket, 18 Lbs. UL
- Push Button Controls
- High Efficiency, Low Water Factor
- 8 Cycles: Regular/Super, Regular/Heavy, Regular/Normal, Regular/Light, Permanent Press/Normal, Permanent Press/Light, Gentle, Extra Rinse
- Two Water Levels
- Bleach and Fabric Softener Dispensers
- Two-Speed Advantage with True Gentle Wash, High Speed Only!
- Deep Rinse System
- Powdered Paint Top and Lid, Stainless Steel Hinges and Plated Console Screws
- High Speed Spin 640 RPM (Approx.)
- Galvanized, Heavy Gauge Cabinet Back, Side and Front Panels, Removable Front Service Panel
- Heavy Duty Motor Coupler Isolator Tested to 20,000 Cycles!*
- 1/2-HP Motor with Built-In Overload Protector: 120-Volt, 60 Hz., A.C. Agitation Speed 180 SPM/High 120 SPM/Low
- Reliable, Direct-Drive NO-BELTS Drive System, Front and Bottom Serviceable
- Extra Long Power Cord, Water Inlet Hoses with Brass Couplings and Corrugated Drain Hose Included!
- 25.22 Gallons Minimum Water Usage per Cycle (Low Water Level, 3 Lbs. Load)
- 2 Year Limited Parts Only Warranty**

* Testing completed 11/12/2001

** Call 1-800-NO-BELTS for warranty details

To locate a distributor near you, please visit
www.whirlpoolcommerciallaundry.com/distributor, or call 1-800-NO-BELTS.

WARRANTIES

EXCLUSIVE 90 DAY FACTORY LABOR WARRANTY!!

WASHER WARRANTY

2-Year Limited (parts only)

For important information regarding warranty inclusions, exclusions and limitations, please call 1-800-N0-BELTS

COMMERCIAL WASHER SPECIFICATIONS


WASHER SPECIFICATIONS

MODEL NUMBER	GCAM2792TQ
GENERAL INFORMATION Stainless steel look push button console, powdered paint finish cabinet, top and lid galvanized, extra thick back panel, reliable dual agitator inlet hoses and corrugated drain hoses included.	8 Cycles: Regular/Super, Regular/Heavy, Regular/Normal, Regular/Light, Permanent Press/Normal, Permanent Press/Light, Gentle, Extra Rinse
MOTOR 120-Volt 1/2-HP Direct-Drive with Built-In Overload Protector	Two-Speed
AGITATION STROKES PER MINUTE/AMPERAGE Maximum Rated Amperage	180 SPM/High (5.0 Amps No Load) 9.8 Amps (120-Volt)
MOTOR RPM	1725 High
SPIN RPM	640 High
ELECTRICAL REQUIREMENTS	120V, 60 Hz., A.C. Standard 15 Amp Breaker/Fuse Branch Circuit for Each Washer (Subject to Local Codes)
DIMENSIONS See Illustrations	43" H (at Metercase Top), 35" H (at Lid), 27" W, 25.5" D
SHIPPING WEIGHT (EST.)	124 Lbs.
BASKET VOLUME	3.2 Cu. Ft.


Energy information is available online at www.whirlpoolcommerciallaundry.com/products, WP literature part #CWXL077B

Dimensions are for planning purposes only. For complete information, see installation instructions packed with product.

NEW YORK CITY M.E.A.

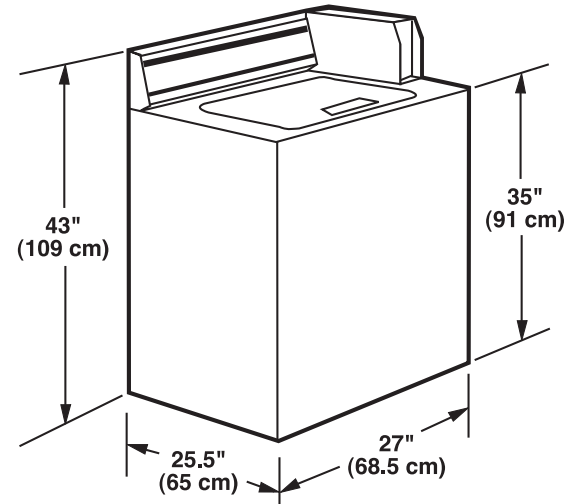

WASHER FRONT VIEW

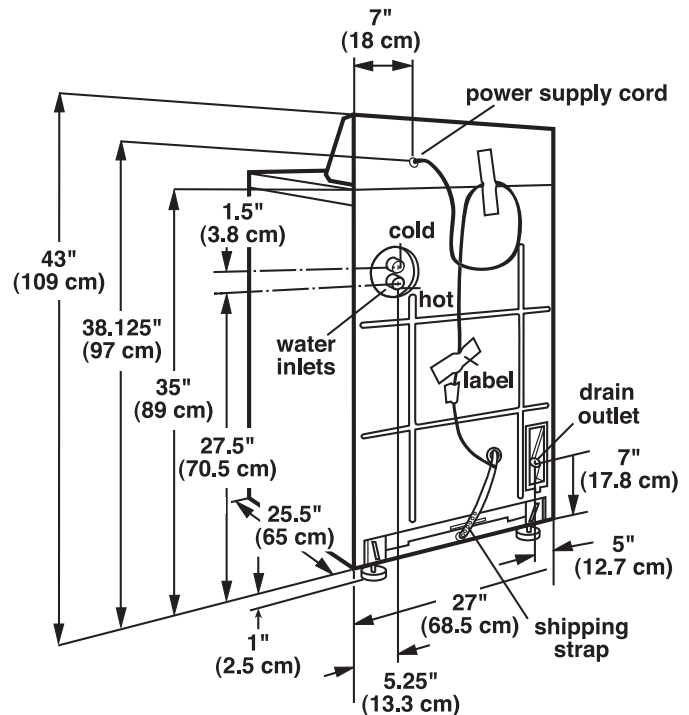

WASHER BACK VIEW

WHIRLPOOL® BRAND COMMERCIAL DRYERS

1/3 HP MOTOR

1/3 HP motor with overload protection.

THERMOSTAT

Single operating thermostat for simple accurate temperature control.



IMPROVED AIRFLOW SYSTEM

Whirlpool® commercial dryers have a new

Blower Housing Wave Insert to increase air velocity up to 10%. This increases efficiency, heating element lifespan, and improves fabric care.*

*Results per Whirlpool dryer testing conducted 7/03-8/04



LARGE 7.0 CU. FT. DRUM CAPACITY

The increased capacity allows for large loads

of clothes to tumble and spread, saving you and your customers drying time and expense.

PULL-UP LARGE CAPACITY TOP MOUNTED LINT FILTER



SIDE SWING DOOR

For convenient access, the wide-opening side-swing door can be opened a full 180°.

RUST PROOF SCREWS

Rust Proof Stainless Steel Torx® control panel screws give your machines added security and service life.



ON PREMISE NON METERED COMMERCIAL DRYER

Featuring Mechanical Controls



GCEM2990T — 29" Electric Dryer GCGM2991T — 29" Gas Dryer Commercial Dryers

EXCLUSIVE 90 DAY FACTORY LABOR WARRANTY!!

- Large 7.0 Cu. Ft. Drum Capacity
- Push Button Controls
- 3 Cycles: Regular/Heavy (High Heat), Permanent Press (Medium Heat), and Knits/Delicates (Low Heat)
- Large, Removable, Top-Mounted Lint Screen
- 180 Degree Wide-Opening Side-Swing Door
- Powdered Paint Cabinet and Top
- Front-Service Accessibility
- Electric Model Features Element Rated at 5600 Watts, 240 Volt
- Gas Model Features a 22K BTU Burner
- Motor: 1/3 HP With Built-In Overload Protector; Centrifugal Switch Turns Off Heating Element When Motor Stops
- Easy-to-Follow Console Instructions
- Power Cord Sold Separately (Electric Model Only)
- 2 Year Limited Parts Only Warranty*

**Call 1-800-NO-BELTS for warranty details.

WARRANTIES

EXCLUSIVE 90 DAY FACTORY LABOR WARRANTY!!

WASHER WARRANTY

2-Year Limited (parts only)

For important information regarding warranty inclusions, exclusions and limitations, please call 1-800-NO-BELTS


COMMERCIAL DRYER SPECIFICATIONS

SINGLE DRYER SPECIFICATIONS

MODEL NUMBER	GCEM2990TQ ^{††}	GCGM2991TQ [†]
GENERAL INFORMATION Stainless Steel Look Push Button Console, white enamel drum, powdered paint finish cabinet and top, removable lint filter	Full Console On Premise Electric Dryer, 3 Cycles: Timed Dry, Automatic, No Heat 3 Temperatures: High, Medium and Low	Full Console On Premise Electric Dryer, 3 Cycles: Timed Dry, Automatic, No Heat 3 Temperatures: High, Medium and Low
ELECTRICAL REQUIREMENTS	3-Wire Nominal 240/208 Volt, 60 Hz, A.C. Standard 30 Amp Breaker/Fuse Branch Circuit per Dryer (Subject to Local Codes)	Nominal, 120 Volt, 60Hz A.C., Standard 15 Amp Breaker/Fuse Branch Circuit per Dryer (Subject to Local Codes)
MOTOR	¹ / ₃ HP Single Speed Motor with Built-In Overload Protector, 5.9 Amps Max Rating	¹ / ₃ HP Single Speed Motor with Built-In Overload Protector, 5.9 Amps Max Rating
HEATER TYPE	ELECTRIC	GAS*
HEATER/BURNER RATING (Add 500 Watts Approx. for Motor on all Dryer Models)	Heater Rated at 5600 Watts	22,000 BTU/h Natural Gas
OPERATIONAL AMPERAGE (Does not Include Control or Gas Valve)	Motor — 4.0 Amps No load Heater 23.33 Amps at 240 Volt 27.33 Total	Motor — 4.0 Amps No load
DIMENSIONS See Illustration Below	42 ⁷ / ₈ " H, 29" W, 27 ³ / ₄ " D	42 ⁷ / ₈ " H, 29" W, 27 ³ / ₄ " D
SHIPPING WEIGHT (EST.)	122 Lbs	124 Lbs
DRUM VOLUME	7.0 Cu. Ft.	7.0 Cu. Ft.

*Burner orifices are available for manufactured, natural, mixed, and LP gas with varying BTU ratings. [†] LP conversion Kit: 49572. ^{††}Power cords on electric models sold separately. Energy information is available online at www.whirlpoolcommerciallaundry.com/products.

Dimensions are for planning purposes only. For complete information, see installation instructions packed with product.

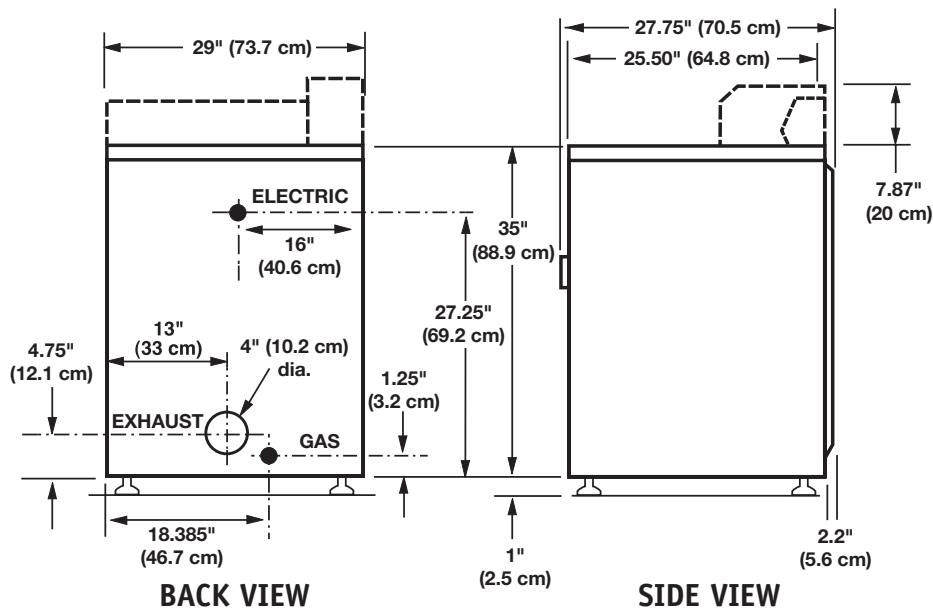

Exhaust Information

All dryers require the equivalent of a 4-inch diameter exhaust duct. Rigid metal duct is recommended. Failure to properly exhaust the dryer will result in improper operation.

# of 90° turns	4" Hood	2 1/2" Hood
Maximum length of 4" diameter rigid metal duct		
0	64 Ft.	58 Ft.
1	54 Ft.	48 Ft.
2	44 Ft.	38 Ft.
3	35 Ft.	29 Ft.
4	27 Ft.	21 Ft.
Maximum length of 4" diameter flexible metal duct		
0	36 Ft.	28 Ft.
1	31 Ft.	23 Ft.
2	27 Ft.	19 Ft.
3	25 Ft.	17 Ft.
4	23 Ft.	15 Ft.



From Whirlpool Corporation — A World Leader in Laundry Products

<http://www.whirlpoolcommerciallaundry.com>

TORX is a registered Trademark of Textron Industries, Inc.

®Registered trademark/™Trademark of Whirlpool, U.S.A.

©2008 Whirlpool Corporation. All rights reserved.

Whirlpool Corporation • Benton Harbor, Michigan 49022 U.S.A.